

1 Watt

7 Pin SIL Package Z



- o Ultra-Miniature Size
- o Regulated Single Output
- o 1000 VDC I/O-Isolation
- o 3000 VDC I/O-Isolation add Suffix „H3“
- o Low Ripple and Noise
- o Continuous Short Circuit Protection
- o Efficiency up to 68%

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF	CAPACITIVE LOAD
				NO LOAD	FULL LOAD		
1ZRS5N3.3M	5 VDC	3.3 VDC	333 mA	30 mA	363 mA	55	220 µF
1ZRS5N5M		5 VDC	200 mA		312 mA	64	
1ZRS5N7.2M		7.2 VDC	138.9 mA				
1ZRS5N9M		9 VDC	111.1 mA	35 mA	307 mA	65	
1ZRS5N12M		12 VDC	83.3 mA		303 mA	66	
1ZRS5N15M		15 VDC	66.7 mA				
1ZRS12N3.3M	12 VDC	3.3 VDC	333 mA	20 mA	148 mA	56	
1ZRS12N5M		5 VDC	200 mA		130 mA	64	
1ZRS12N7.2M		7.2 VDC	138.9 mA		128 mA	65	
1ZRS12N9M		9 VDC	111.1 mA		126 mA	66	
1ZRS12N12M		12 VDC	83.3 mA		126 mA	66	
1ZRS12N15M		15 VDC	66.7 mA		122 mA	68	
1ZRS24N3.3M	24 VDC	3.3 VDC	333 mA	10 mA	74 mA	56	
1ZRS24N5M		5 VDC	200 mA		66 mA	63	
1ZRS24N7.2M		7.2 VDC	138.9 mA		64 mA	65	
1ZRS24N9M		9 VDC	111.1 mA		63 mA	66	
1ZRS24N12M		12 VDC	83.3 mA				
1ZRS24N15M		15 VDC	66.7 mA		62 mA	67	

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS

Input Voltage Range	±10%
Input Filter	Capacitors
Input Reflected Ripple Current ¹⁾	20 mA p-p

OUTPUT SPECIFICATIONS

Voltage Accuracy	±2%
Temperature Coefficient	±0.02%/°C
Capacitive Load ²⁾	see table
Ripple & Noise (20 MHz bandwidth)	50 mV p-p
Short Circuit Protection	Continuous
Line Regulation	±0.5%
Load Regulation (0% Load to Full Load)	±0.5% ±1.0%

NOTE:

1. Measured Input reflected ripple current with a simulated source inductance of 12 µH.
2. Tested by minimal V_{in} and constant resistive load.

GENERAL SPECIFICATION

Efficiency	see table
Isolation Voltage (3 sec) Suffix "H3"	Input/Output 1000 VDC 3000 VDC
Isolation Resistance	1000 Mohms
Isolation Capacitance	60 pF
Switching Frequency	variable 50 kHz
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +125°C
Case Temperature	+100°C max.
Cooling	Natural Convection
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	>3.5Mhrs
Safety Standard (designed to meet)	IEC 60950-1
Dimensions	0.76x0.28x0.39 Inches (19.5x7.2x10.0 mm)
Case Material	Non-conductive black plastic (UL94V-0 rated)
Pin Material	ø0.5 mm Alloy42 Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	2.7 g

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

ABSOLUTE SPECIFICATIONS

These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

Input Voltage (100 mS)	5 V	0 VDC to 7 VDC
	12 V	0 VDC to 15 VDC
	24 V	0 VDC to 28 VDC


Models Lead Soldering Temperature (1.5 mm from case 10 sec.)	+260°C
--	--------

NOTE:

Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.

MECHANICAL SPECIFICATIONS

Case "Z"

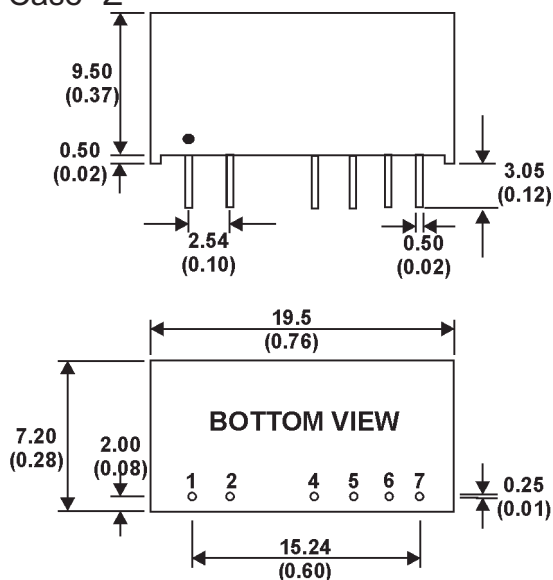

PIN CONNECTIONS		
	1K VDC	3K VDC
1	+INPUT	+INPUT
2	-INPUT	-INPUT
4	-OUTPUT	PIN NO
5	PIN NO	-OUTPUT
6	+OUTPUT	PIN NO
7	NO PIN	+OUTPUT




All Dimensions in mm (Inches).
 Tolerance:
 Pin diameter: 0.5±0.05 (0.02±0.002)
 Pin pitch tolerance: ±0.35(±0.014)
 Case Tolerance: ±0.5(±0.02)

SPECIFICATIONS


All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

APPLICATION NOTES & DIAGRAMS

Efficiency-Load Deviation

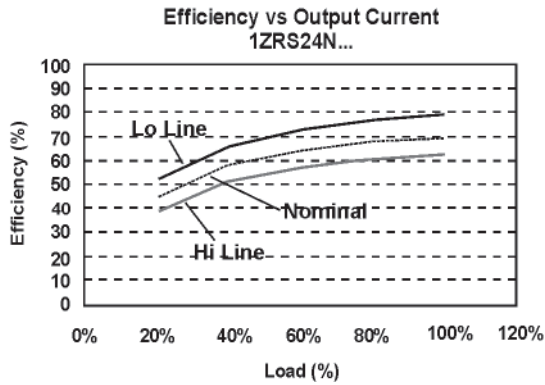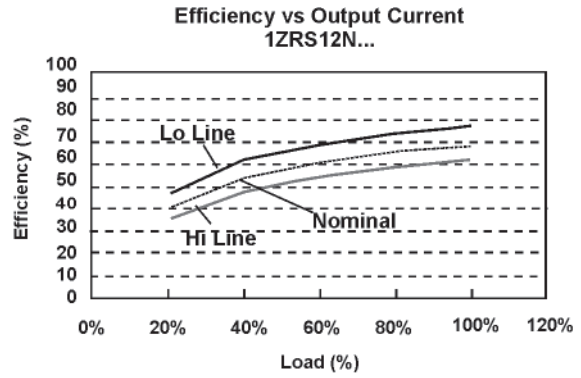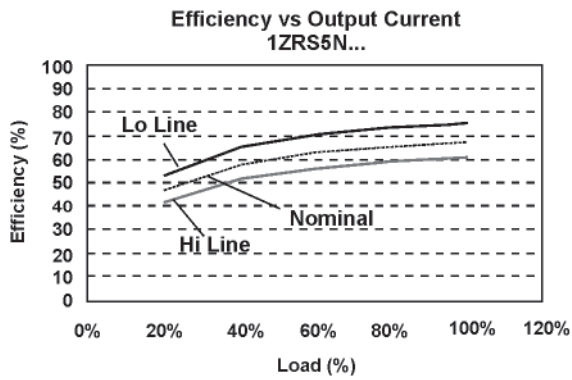

Derating Curve

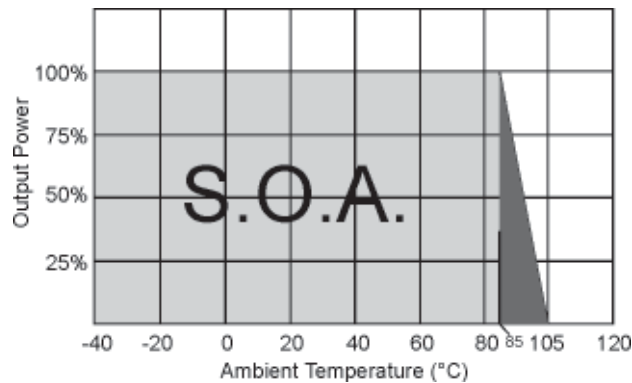

NOTICE:
The information in this document has been carefully checked. However, no responsibility is assumed for inaccuracies! Specifications can be changed without notice. The latest and most complete information can be found on our website.