

100 Watt

2.28x2.40 Inch Package M

4:1 Input Range

High Efficiency



- o Efficiency up to 93%
- o Wide Input Range
- o Regulated Single Output
- o Continuous Short Circuit Protection
- o Half Brick Size, Six-Sided Shield Metal Case
- o Over Temperature/Voltage/Current Protection
- o No Tantalum Capacitor Inside
- o CE Mark Meets 2004/108/EC
- o Safety Meets UL60950-1, EN60950-1, IEC60950-1



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT MAX.	INPUT CURRENT		%EFF		CAPACITOR LOAD MAX.
				NO LOAD	FULL LOAD	1)	2)	
100MERS24X3.3LC	9-36 VDC	3.3 VDC	25 A	200 mA	3.94 A	85.5	87	25000 μ F
100MERS24X5LC		5 VDC	20 A	150 mA	4.66 A	88.5	89.5	20000 μ F
100MERS24X12LC		12 VDC	8.4 A	200 mA	4.62 A	90	90.5	8400 μ F
100MERS24X15LC		15 VDC	6.7 A			89.5	90.5	6700 μ F
100MERS24X24LC		24 VDC	4.2 A	100 mA	4.76 A	88.5	89	4200 μ F ³⁾
100MERS24X48LC		48 VDC	2.1 A			89.5	88.5	2100 μ F ³⁾
100MERS48X3.3LC	18-75 VDC	3.3 VDC	25 A	130 mA	1.96 A	87.5	88	25000 μ F
100MERS48X5LC		5 VDC	20 A		2.28 A	91.5	92	20000 μ F
100MERS48X12LC		12 VDC	8.4 A	100 mA	2.26 A	92.5	93	8400 μ F
100MERS48X15LC		15 VDC	6.7 A			91.5	92.5	6700 μ F
100MERS48X24LC		24 VDC	4.2 A	100 mA	2.32 A	91	91	4200 μ F ³⁾
100MERS48X48LC		48 VDC	2.1 A			91.5	90.5	2100 μ F ³⁾

NOTE

1. Measured at 12 VDC for 100MERS24X--LC, 24 VDC for 100MERS48X--LC.

2. Measured at Nominal Input Voltage.

3. Require a 10 μ F Aluminum Capacitor connected between +Vout and -Vout for 24 & 48 Vout Models.

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS

Input Voltage Range		4:1
Input Surge Voltage (100 ms max.)	24 V 48 V	50 VDC max. 100 VDC max.
Under Voltage lockout	24 Vin power up 24 Vin power down 48 Vin power up 48 Vin power down	8.8 V 8 V 17 V 16 V
Positiv Logic Remote ON/OFF ¹⁾	Logic Compatibility Module ON Module OFF	Open Collector Ref. to -Input >3.5 VDC to 75 VDC or Open Circuit <1.2 VDC
Input Filter		Pi Type

OUTPUT SPECIFICATIONS

Voltage Accuracy		±1.5% max.
Transient Response	25% Step Load Change	<500µ sec.
External Trim Adj. Range		±10%
Ripple and Noise at 20 MHz BW ²⁾	3.3V, 5V	40 mV RMS 100 mV p-p max.
	12V, 15V	60 mV RMS 120 mV p-p max.
	24 V	100 mV RMS 240 mV p-p max.
	48 V	200 mV RMS 480 mV p-p max.
Temperature Coefficient		±0.03%/°C
Short Circuit Protection		Continuous
Line Regulation ³⁾		±0.2% max.
Load Regulation ⁴⁾		±0.2% max.
Over Voltage Protection trip Range, % Vo nom.		115-140%
Current Limit		110% ~ 140% Nominal Output
Start Up Time		10 mS

NOTE:

- Add Suffix "R" to the Module Number with Negative Logic Remote ON/OFF.
Module ON.....<1.2 VDC
Module OFF.....>3.5 VDC to 75 VDC or Open Circuit
- Output Ripple & Noise measured with 10 µF tantalum and 1 µF ceramic capacitor across output.
- Measured from High Line to Low Line.
- Measured from Full Load to Zero Load.

SPECIFICATIONS


All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

GENERAL SPECIFICATION

Efficiency		see table
Isolation Voltage	Input / Output Input / Case Output/Case	1500 VDC min. 1500 VDC min. 1500 VDC min.
Isolation Resistance		10 MOhms min.
Isolation Capacitance		1000 pF
Switching Frequency		250 kHz
Operating Case Temperature		-40°C to +105°C
Storage Temperature		-55°C to +105°C
Thermal Shutdown (Case Temperature)		+110°C
Humidity		95% RH max. Non Condensing
MTBF (MIL-STD-217F, GB, 25°C, Full Load)	5 V Others	750 khrs 880 khrs
Dimensions		2.28x2.4x0.5 Inches (57.9x61.0x12.7 mm)
Case Material		Aluminum with Non-Conductive Base
Weight		95 g

MECHANICAL SPECIFICATIONS

Case „M“

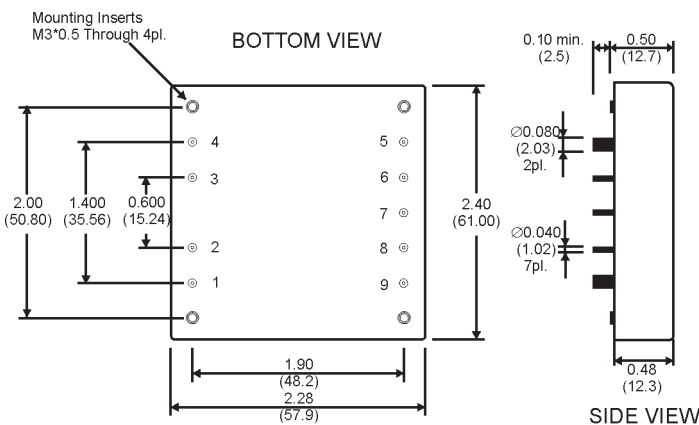


All Dimensions in Inches (mm).
Tolerance: x.xx=±0.02, x.xxx=±0.010 Inches
(x.x=±0.5, x.xx=±0.250 mm)

PIN CONNECTIONS	
1	+INPUT
2	REMOTE CONTROL
3	CASE
4	-INPUT
5	-OUTPUT
6	-SENSE
7	TRIM
8	+SENSE
9	+OUTPUT



SPECIFICATIONS
All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

DIAGRAMS

Derating Curve

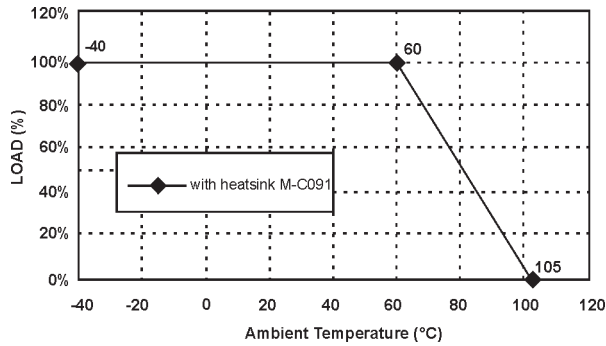

APPLICATION NOTE

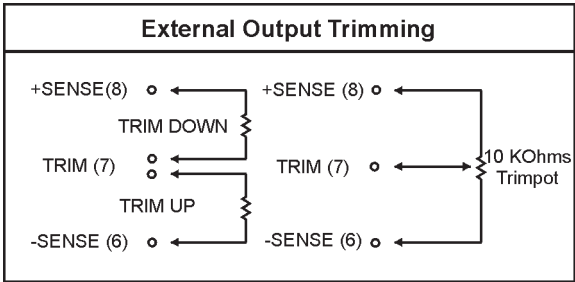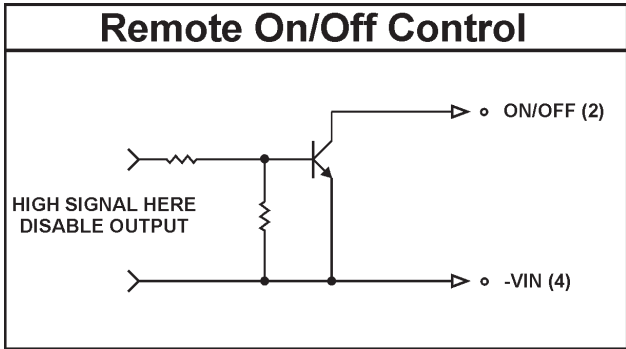

NOTICE:
The information in this document has been carefully checked. However, no responsibility is assumed for inaccuracies! Specifications can be changed without notice. The latest and most complete information can be found on our website.