

50 Watt

1.45x2.28 Inch Package Q

4:1 Input Range

High Efficiency



- o High Efficiency up to 92%
- o No Tantalum Capacitor Inside
- o Quarter-Brick Size, Six-Sided Shield Metal Case
- o Regulated Single Output
- o Continuous Short Circuit Protection
- o Over Temperature/Voltage/Current Protection
- o Full Load Operation up to 80°C with Heat-sink M-C091 Natural Convection
- o CE Mark Meets 2004/108/EC
- o Safety Meets UL60950-1, EN60950-1 and IEC60950-1



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	(2)	(3)	
50QERS24X3.3LC	9-36 VDC	3.3 VDC	0 mA	10 A	100 mA	1528 mA	90	90.5	10000 µF
50QERS24X5LC		5 VDC				2277 mA	91	91.5	
50QERS24X12LC		12 VDC				2261 mA			
50QERS24X15LC		15 VDC		3.33 A	2287 mA	91.5			
50QERS24X24LC		24 VDC		2.08 A	60 mA	2311 mA	90	90	2080 µF
50QERS24X48LC		48 VDC		1.04 A	60 mA	2311 mA	88.5	88.5	1040 µF ⁴⁾
50QERS48X3.3LC	18-75 VDC	3.3 VDC	0 mA	10 A	60 mA	764 mA	90	90	10000 µF
50QERS48X5LC		5 VDC				1132 mA	91.5	92	
50QERS48X12LC		12 VDC				1130 mA	92	92	
50QERS48X15LC		15 VDC		3.33 A		1144 mA	91	91	3330 µF
50QERS48X24LC		24 VDC		2.08 A		1156 mA	91	90.5	2080 µF
50QERS48X48LC		48 VDC		1.04 A		1156 mA	89	89	1040 µF ⁴⁾

NOTE

1. Nominal Input Voltage 24, 48 VDC.
2. Measured at 12 VDC for 50QERS24X--LC, 24 VDC for 50QERS48X--LC.
3. Measured at Nominal Input Voltage.
4. Require a 10 µF Aluminum Capacitor connected between +Vout and -Vout for 48 Vout-Models.

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS		
Input Voltage Range		4:1
Input Surge Voltage (100 ms max.)	24 V 48 V	50 VDC max. 100 VDC max.
Under Voltage Lockout	24 Vin power up	8.8 V
	24 Vin power down	8.0 V
	48 Vin power up	17 V
	48 Vin power down	16 V
Positive Logic Remote ON/OFF ¹⁾	Logic Compatibility Module ON Module OFF	Open Collector Ref. to -Input >3.5 VDC to 75 VDC or Open Circuit <1.2 VDC
Input Filter		PI Type

OUTPUT SPECIFICATIONS		
Voltage Accuracy		±1.5% max.
Transient Response (75% to 100% Step Load Change)	Error Band Recover Time	±5% Vout <500 µs
External Trim Adj. Range		±10%
Ripple and Noise, 20 MHz BW ²⁾	3.3 V, 5 V	40 mV RMS 100 mV p-p max.
	12 V, 15 V	60 mV RMS 150 mV p-p max.
	24 V	100 mV RMS 240 mV p-p max.
	48 V	200 mV RMS 480 mV p-p max.
Temperature Coefficient		±0.03%/°C
Short Circuit Protection		Continuous
Line Regulation ³⁾		±0.2% max.
Load Regulation ⁴⁾		±0.2% max.
Over Voltage Protection trip Range, % Vo nom.		115-140%
Current Limit		110%-165% Nominal Output
Start Up Time		20 ms

NOTE

1. Add Suffix "R" to the Model Number with Negative Logic Remote ON/OFF

Module ON	<1.2 VDC
Module OFF	>3.5 VDC to 75 VDC or open Circuit

2. Output Ripple and Noise measured with 10 µF aluminum and 1 µF ceramic capacitor across output for 48 Vout and with 10 µF tantalum and 1 µF ceramic capacitor for others.

3. Measured from High Line to Low Line.

4. Measured from Full Load to Zero Load.

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

GENERAL SPECIFICATION


Efficiency		see table
Isolation Voltage	Input / Output Input / Case Output / Case	1500 VDC min.
Isolation Resistance		10 Mohms min.
Isolation Capacitance		1000 pF
Switching Frequency		300 kHz
Operating Case Temperature		-40°C to +105°C
Storage Temperature		-55°C to +125°C
Thermal Shutdown, Case Temperature		+110°C
Humidity		95% RH max. Non Condensing
Safety Standard (designed to meet)		UL60950-1, EN60950-1, IEC60950-1
CE Mark Meets		2004/108/EC
MTBF (MIL-STD-217F, GB, 25°C, Full Load)	24, 48 Vout 3.3, 5, 12, 15 Vout	800 khrs 600 khrs
Dimensions		1.45 x 2.28 x 0.50 Inches (36.8 x 57.9 x 12.7 mm)
Case Material		Aluminum with Non-Conducted Base
Weight		63 g

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

MECHANICAL SPECIFICATIONS

Case „Q"

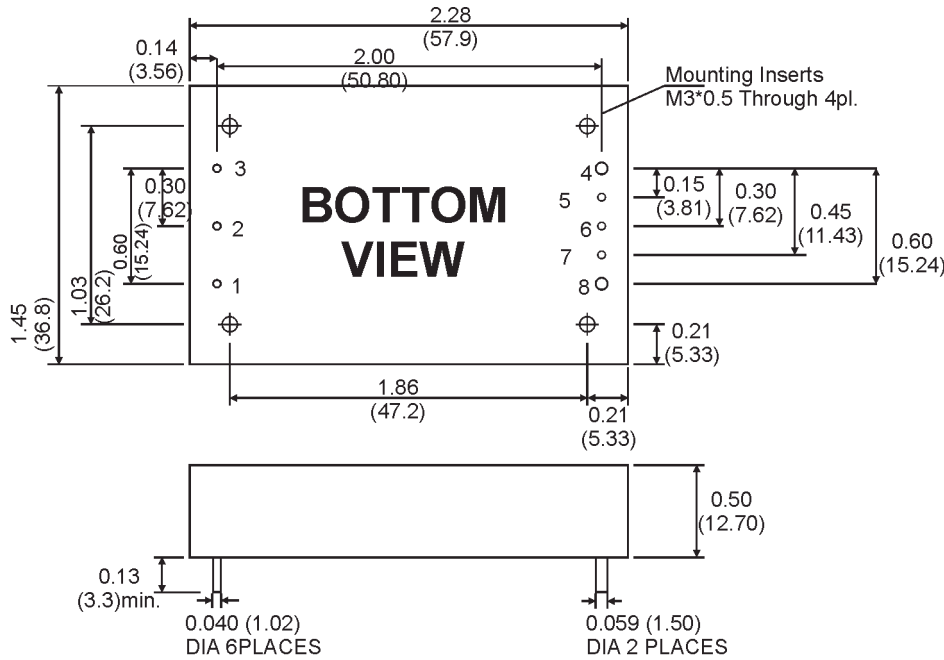

PIN CONNECTIONS	
1	+INPUT
2	REMOTE CONTROL
3	-INPUT
4	-OUTPUT
5	-SENSE
6	TRIM
7	+SENSE
8	+OUTPUT

All Dimensions in Inches (mm).
 Tolerance x.xx=±0.02, x.xxx=±0.010 Inches
 (x.x=±0.5, x.xx=±0.25 mm)

DIAGRAMS

